

Emergency Stainless Steel Combination Shower with Hand/Foot Operated No-Bowl Eyewash

Enware's emergency eye/face wash units flush hazardous contaminants and irritants from eyes and surrounding facial area.

ENBE090

Designed and manufactured in Australia.

Stainless steel construction provides superior durability and reliability.

FEATURES

- Independently tested for compliance to ANSI Z358.1 and AS4775
- Freestanding for stand-alone operation
- Stainless steel pipe work and stay-open ball valve
- Stainless steel 200 mm (8") shower head assembly
- Stainless steel pull rod activated shower with high visibility yellow epoxy coating
- Push and foot activated eyewash with soft aerated flow and integral auto-open dust covers
- Zero velocity apex point provides more comfort and control for effective cleansing of eyes
- Self-draining design reduces Legionella risk, particularly in tepid water applications
- Solid stainless, low angle foot pedal for easy activation of eyewash
- High visibility yellow epoxy coated push handle and foot pedal
- Balanced simultaneous operation



Product Codes


ENBE090	Standard Brushed Stainless Steel Finish
ENBE090GR	■ Green Epoxy Powder Coated Finish
ENBE090R	■ Orange Epoxy Powder Coated Finish
ENBE090YE	■ Yellow Epoxy Powder Coated Finish
ENBE090WH	■ White Epoxy Powder Coated Finish

OPTIONS

- Audio/Visual alarms for alerts
- Flow pressure and proximity switches to activate alarms & lights
- Thermal relief valve removes built-up hot water
- Insulation of pipe work to moderate water temperature build up
- Anti-freeze valve for cold weather applications
- NPT flange connectors
- Custom manufacturing & design
- Standards compliant signage

Technical Information

Inlet Connection	25 mm (1") BSP
Water Supply Line Size	Must be hydraulically sized to meet requirements.
Minimum Performance Requirements	Min Working Pressure: 210 kPa Caution should be taken when pressure exceeds 550 kPa (80 psi) Shower: Min Flow Requirements: 76 lpm (20 US gpm) Eyewash: Min Flow Requirements: 17 lpm (4.5 US gpm)
Mounting Base Plate	Size: 150 x 150 mm (5 9/10" x 5 9/10") with 4 Bolt Holes 11 mm (7/16")
Shipping	Weight: approx. 12.7 kg Dimensions: 1160 x 300 x 250 mm

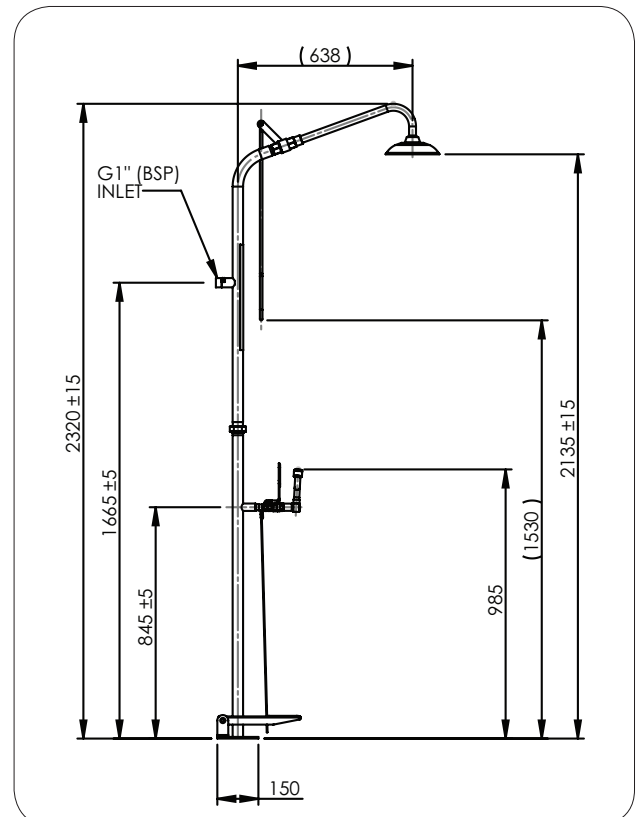

Version: May 18

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au

