

# Emergency Eye/Face Wash Pedestal Mounted Hand Operated

## EFE360

Enware's emergency eye/face wash units flush hazardous contaminants and irritants from eyes and facial area.


Designed and manufactured in Australia. Stainless steel construction provides superior durability and reliability.

### FEATURES

- Independently tested for compliance to ANSI Z358.1 and AS4775
- Freestanding for stand-alone operation
- Stainless steel bowl, stay-open ball valve and hand actuator
- Integral volume adjustment control
- Push activated eye/face wash with integral auto-open dust covers
- Eye/face wash features "Vertex Technology" where dedicated eyewash and independently angled face wash streams deliver optimum coverage
- Zero velocity apex point provides more comfort and control for effective cleansing of eyes
- High visibility yellow epoxy coated push handle

### ADDITIONAL OPTIONS:

- Foot activation kit for eye/face wash activation - ESPE001
- Audio/Visual alarms for alerts
- Flow pressure and proximity switches to activate alarms & lights
- Thermal relief valve removes built-up hot water
- Insulation of pipe work to moderate water temperature build up
- Anti-freeze valve for cold weather applications
- NPT flange connectors
- Custom manufacturing & design
- Standards compliant signage

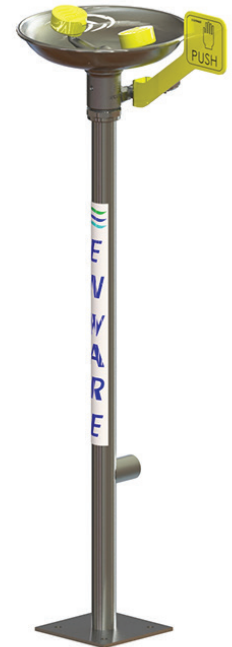

### Product Codes


<b>EFE360</b>	Standard Brushed Stainless Steel Finish
<b>EFE360GR</b>	Green Epoxy Powder coated Finish
<b>EFE360OR</b>	Orange Epoxy Powder coated Finish
<b>EFE360YE</b>	Yellow Epoxy Powder coated Finish
<b>EFE360WH</b>	White Epoxy Powder coated Finish

### Technical Information

Inlet Connection	15 mm (1/2") BSP
Water Supply Line Size	Must be hydraulically sized to meet requirements.
Minimum Performance Requirements	210 kPa Caution should be taken when pressure exceeds 550 kPa (80 psi)
Minimum Flow Requirements	26 lpm (6.9 US gpm)
Waste Water Outlet Size	38 mm (1 1/2") OD
Mounting Base Plate Size	150 x 150 mm (5 9/10" x 5 9/10") with 4 Bolt Holes 11 mm (7/16")
Weight	approx. 9kg
Dimensions	1160 x 300 x 250 mm

Installation of emergency showers, eye and eye/face wash equipment shall be in accordance with AS/NZS4775-2007 or ANSI Standard Z358.1-2009 - whichever is applicable to the installation. Enware Australia advises:

1. Due to ongoing Research and Development, specifications may change without notice.
2. Component specifications may change on some export models.

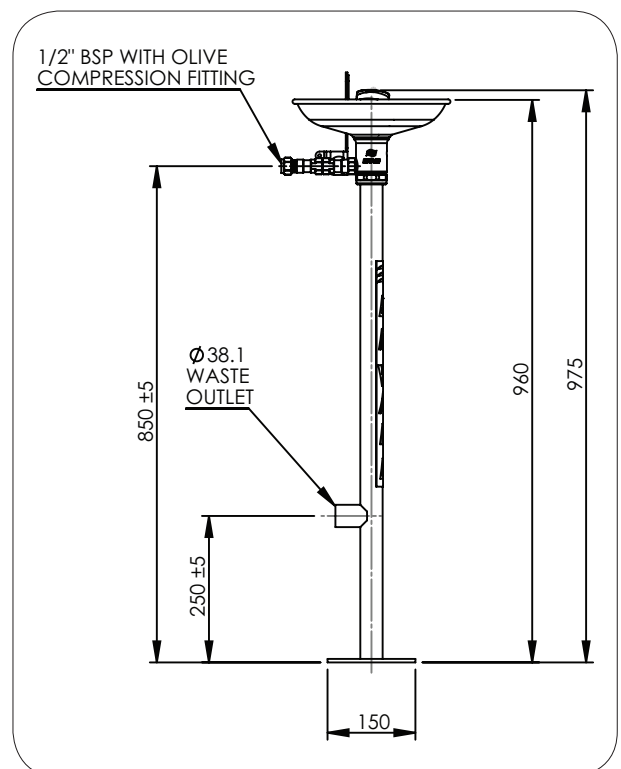

Version: Mar 17

Call 1300 369 273  
[www.enware.com.au/ehs](http://www.enware.com.au/ehs)

Enware Australia Pty Limited  
 9 Endeavour Rd Caringbah NSW 2229 Australia  
 Ph: 02 8536 4000 Fax: 02 8556 4055

**ENWARE**  
 installing confidence

A range of spare parts are available to maintain equipment and replacement of damaged parts.

Description	Order Code
1 Eye and Eye/Face Wash Frame Only	ESPE815
2 Push Handle to suit Eye and Eye/Face Washes	ESPE010
3 Bowl only	ESPE008
4 Eye/Face Wash outlet includes dustcover & aerator (each)	ESPE012
5 Aerator to suit Eye/Face Wash only	ESPE013

