

# Emergency Eyewash No-Bowl Pedestal Mounted Hand/Foot Operated

Enware's emergency eyewash units flush hazardous contaminants and irritants from eyes and surrounding facial area.

Designed and manufactured in Australia.

Stainless steel construction provides superior durability and reliability.


## ENBE210

### FEATURES

- Independently tested for compliance to ANSI Z358.1 and AS4775
- Freestanding for stand-alone operation
- Stainless steel stay-open ball valve and hand actuator
- Push foot activated eyewash with soft aerated flow and integral auto-open dust covers
- Zero velocity apex point provides more comfort and control for effective cleansing of eyes
- Self-draining design reduces Legionella risk, particularly in tepid water applications
- Solid stainless, low angle foot pedal for easy activation of eyewash
- High visibility yellow epoxy coated push handle and foot pedal

### Product Codes

ENBE210	Standard Brushed Stainless Steel Finish
ENBE210GR	<span style="color: green;">■</span> Green Epoxy Powder Coated Finish
ENBE210OR	<span style="color: orange;">■</span> Orange Epoxy Powder Coated Finish
ENBE210YE	<span style="color: yellow;">■</span> Yellow Epoxy Powder Coated Finish
ENBE210WH	<span style="color: white;">■</span> White Epoxy Powder Coated Finish

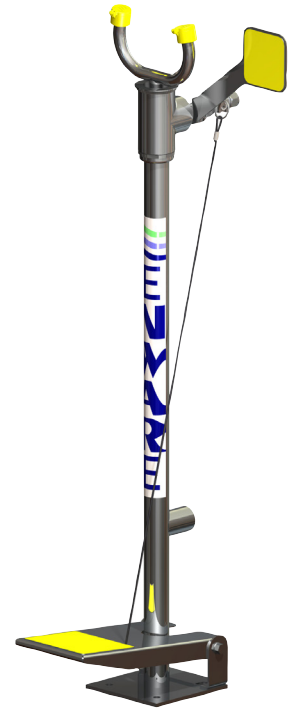


### OPTIONS

- Audio/Visual alarms for alerts
- Flow pressure and proximity switches to activate alarms & lights
- Thermal relief valve removes built-up hot water
- Insulation of pipe work to moderate water temperature build up
- Anti-freeze valve for cold weather applications
- NPT flange connectors
- Custom manufacturing & design
- Standards compliant signage

### Technical Information

Inlet Connection	1/2" BSP
Water Supply Line Size	Must be hydraulically sized to meet requirements.
Minimum Performance Requirements	Min Working Pressure: 210 kPa Caution should be taken when pressure exceeds 550 kPa (80 psi) Min Flow Requirements: 17 lpm (4.5 US gpm)
Waste Water Outlet Size	38 mm (1 1/2" OD)
Mounting Base Plate	Size: 150 x 150 mm (5 9/10" x 5 9/10") with 4 Bolt Holes 11 mm (7/16")
Shipping	Weight: approx. 9 kg Dimensions: 1160 x 300 x 250 mm

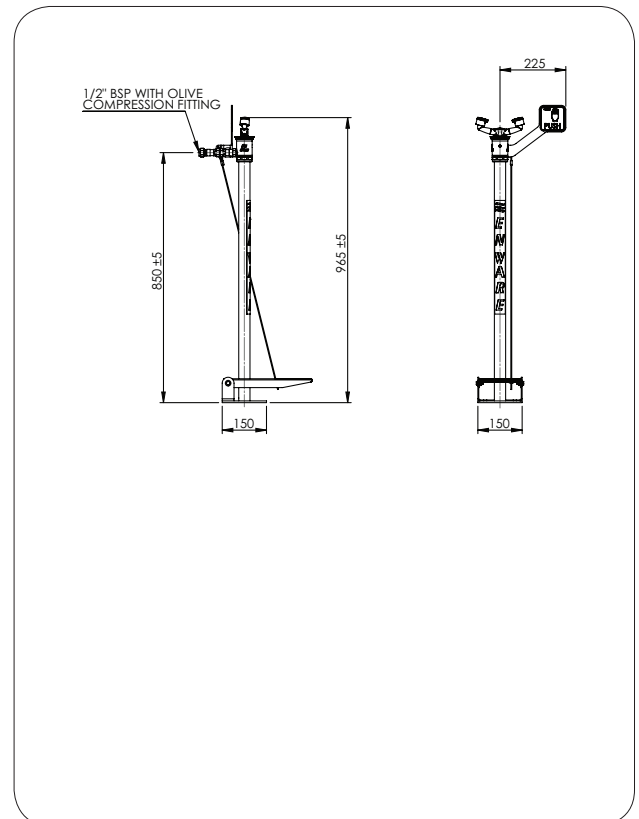

Version: May 18

Call 1300 369 273  
www.enware.com.au

Enware Australia Pty Limited  
9 Endeavour Rd Caringbah NSW 2229 Australia  
Ph: 02 8536 4000 info@enware.com.au

