The Custodian® Toilet Flushing Control Panel

Providing Safety and Security With Enhanced Comfort and Care

The Custodian® offers individual control and enhanced comfort while maintaining maximum safety and security.

The Custodian® Range is the complete secure bathroom solution designed to improve the rehabilitative process.

FEATURES


- Smooth and attractive design with pictogram etchings
- Robust and secure, impact resistant, designed to exceed IK10 requirements
- Exceeds Anti-Ligature requirements of TS001:2013 *
- Suitable for a wide variety of construction methods, designed to reduce installation time and improve space efficiency in duct risers
- Easy to install with IP68 Rated cable connections
- The Control Panel is connected to the Smartboard and the Smartflow Management system. System reporting of all functions is provided through the Smartflow Water Management system.



Available for Duct Installation, Front Fixing, Fixture Mount and Recessed installation.

Product Codes

| CN2DF-SD | Dual Flush, Standard Duct Installation |
|----------|--|
| CN2DF-FF | Dual Flush, Recessed Mount In Wall, Front Fixed |
| CN2DF-FP | Dual Flush, Recessed Mount In Fixture, Front Fixed |
| CN1SF-SD | Single Flush, Standard Duct Installation |
| CN1SF-FF | Single Flush, Recessed Mount In Wall, Front Fixed |
| CN1SF-FP | Single Flush, Recessed Mount In Fixture, Front Fixed |



• WMSSB-000 Custodian® Smartboard or

WMSSB-001 Custodian® Smartboard with Solenoids
 WMS8312 WC Flushing Solenoid Assembly
 WMS8004 Single Cell Cable Package

• Connection to Smartflow Water Management System











Technical Information

| Facia Plate Material Grade | 316 Stainless Steel |
|--|---|
| Run Time, Temperature Range, Function (Piezo Button, Temperature Adjustment Wheel) | Controlled by Custodian Smart Board and Smartflow Water Management System |
| Operating Voltage | 12V |
| Rating - Piezo Button | IP 68, IK10 |
| IP Rating - TLI wheel (Temperature control wheel and activation button) | IP 68 |

NOTE: Enware Australia advises: 1. Due to ongoing Research and Development, specifications may change without notice. 2. Component specifications may change on some export models.

Version: Jun 20








^{*} It is recommended that approved anti-pick sealant be used around panel edges

The Custodian® Toilet Flushing Control Panel



CN2DF-SD


Dual Flush Standard Duct Installation

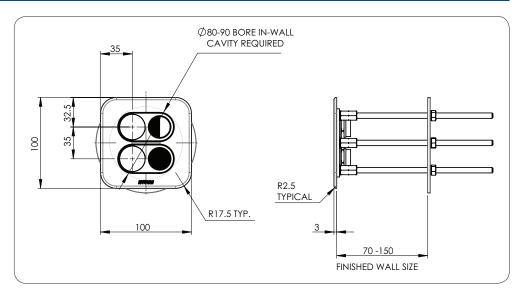



CN2DF-FF


Dual Flush Recessed Mount In Wall Front Fixed

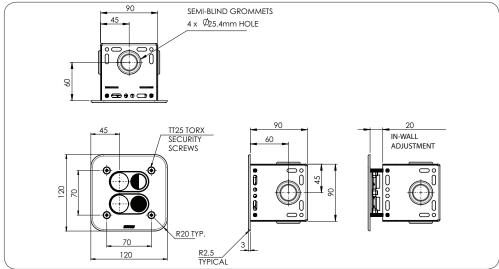



CN2DF-FP

Dual Flush Recessed Mount In Fixture Front Fixed

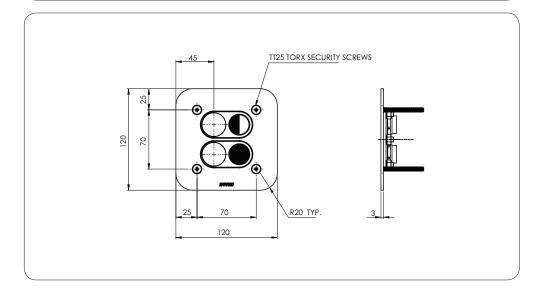

Version: Jun 20






The Custodian® Toilet Flushing Control Panel



CN1SF-SD


Single Flush Standard Duct Installation

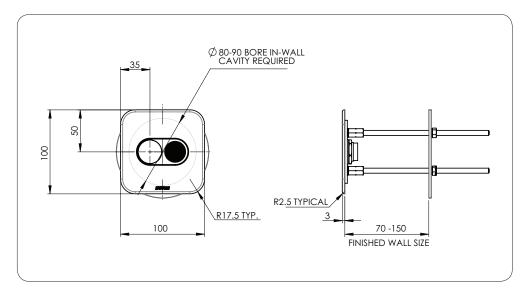



CN1SF-FF


Single Flush Recessed Mount In Fixture Front Fixed

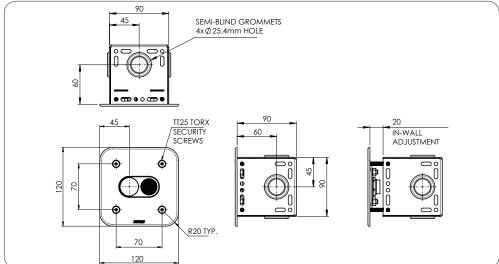



CN1SF-FP

Single Flush Recessed Mount In Fixture Front Fixed

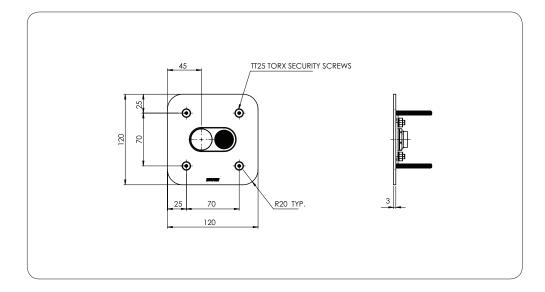

Version: Jun 20



