# Four Way Stainless Steel Column Shower with Foot Wash

Enware's stainless steel column showers have proven durability with a vandal resistant design and water efficient time flow technology for automatic shut off to reduce water wastage.

Ideal for outdoor beach front and swimming pool applications.

### **FEATURES**

- Manufactured from 316 grade 2mm stainless steel
- Stainless surface finish is a 2B general purpose finish
- Chrome plated brass fittings
- Includes integral 3/4" isolation valve and 3/4" Pressure Limiting Valve
- Time flow (shower duration) pre-set to 15 seconds (±5), flow rate is adjustable at the time flow valve
- Access panel fixed using vandal proof security screw. (Removable for servicing using torx key)
- Time flow cartridge is serviceable using either TFC790 cartridge assembly or TFC797 service kit.

## **ECS401**



### **Product Codes**

ECS401


Four Way Stainless Steel Column Shower with Foot Wash - 15 seconds (±5) flow time

## Technical Information

| Inlet Connection             | 3/4" BSP     |
|------------------------------|--------------|
| Recommended Working Pressure | 350 kPa      |
| Operating Working Pressure   | 50 - 500 kPa |
| Flow Rate                    | 8 l/m        |

Enware tapware must be installed in accordance with the provisions of AS/NZS3500 and any relevant local regulations. Installations not complying with AS/NZS3500 may void the product and performance warranty provisions.

The performance of Enware AS/NZS 3718 tapware, in many cases, exceeds the plumbing system design requirements of the Plumbing Code of Australia and AS/NZS 3500.

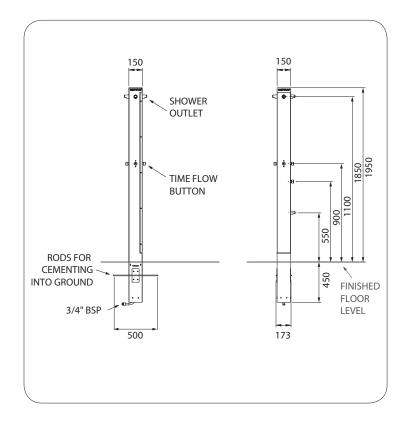



\*WELS 3 Star Rating Efficiency Rating applies to the Beach Shower Outlet (VP310)

Version: Oct 17





