

WC Flush Valve Assembly - 20mm 12 VDC

WMS8312

Enware Custodian WC Dual Flush Solenoid for Smartflow WMS. Piezo operated Stainless Steel 12V Solenoid includes airbreak, isolation, in-line filter and 25mm inlet connection. For use with Custodian piezo operated flush panels.


Note: Must be used in conjunction with Custodian Smartboard

FEATURES

- Stainless steel solenoid
- Isolation with integrated in-line filter
- Suitable for Water Management Systems

Product Codes

WMS8312 WC Flush Valve Assembly - 20mm 12VDC

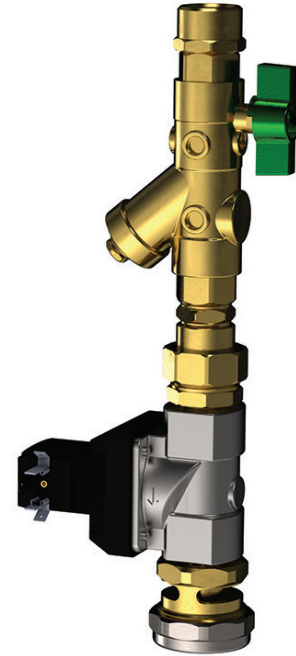


Technical Information

Water Supply	300 kPa
Connection	Inlet - 1" BSP (25mm)
	Outlet - 1 1/2" BSP (40mm)
Minimum Water Supply Line Size	1" (25mm) copper pipe
Mains Powered	12V DC transformer
Kv Factor	8.3m ³ /h
Flush Pipe	1 1/2" (40mm) flush pipe is required below the air break. (Note: use a maximum of 1x90° bend in flush pipe. If an offset is required 2 x 45° bends must be used. Maximum of 1 offset per flush pipe. Air break must be installed in a vertical position at 700mm +/- 100 mm above the pan inlet.

Enware products must be installed in accordance with the provisions of AS/NZS3500 and any relevant local regulations. Installations not complying with AS/NZS3500 may void the product and performance warranty provisions. As Enware's product development is ongoing, product specifications may vary over time.

* WELS volume is only achieved at 300kPa. Use a pressure limiting valve to achieve WELS rating when required.

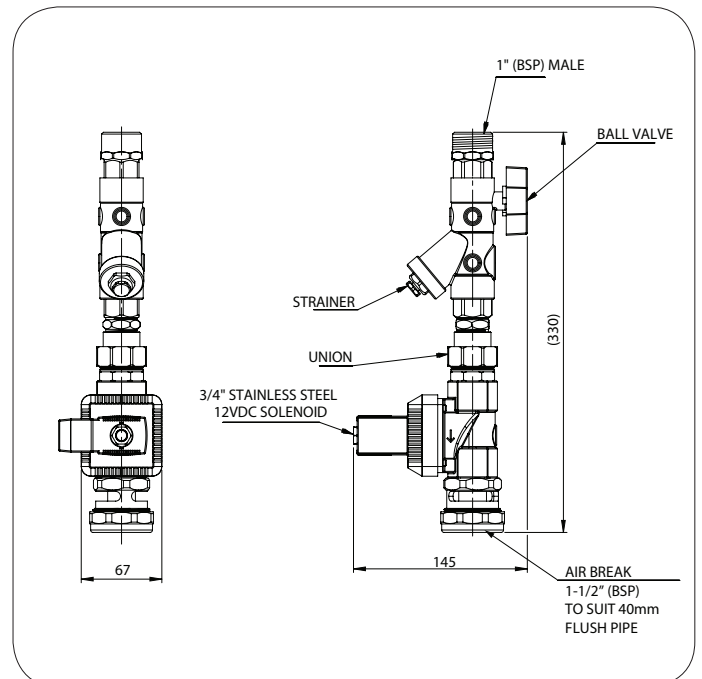

Version: Jun 20

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au

