

# NEW AQUABLEND® Mini TMV

ATM500



**WaterMark**<sup>TM</sup>  
AS/NZS 4032.1  
Lic1593

*Shown Actual Size*

## SPACE SAVING

Only 90mm x 90mm footprint. Fast and economical to install and service.  
Small enough to conceal for a neat, clean and professional finish.

To find out more information about the Aquablend® Mini TMV visit [enware.com.au](http://enware.com.au)  
[www.enware.com.au](http://www.enware.com.au) | 1300 369 273 | [info@enware.com.au](mailto:info@enware.com.au)

 ENWARE

## THERMAL FLUSH

Sanitising function  
No recommissioning required



## WALL BRACKET

Mounting bracket for a convenient and compliant installation. Includes screws.

## INCLUDES


Integral non-return valves, strainers and 1/2" BSPMI inlet/outlet connections with compression nuts and olives

## LOW LEAD CONTENT

(Less than 0.25% actual)

## 12 LITRES PER MINUTE

Sufficient supply for 2 basins or a shower

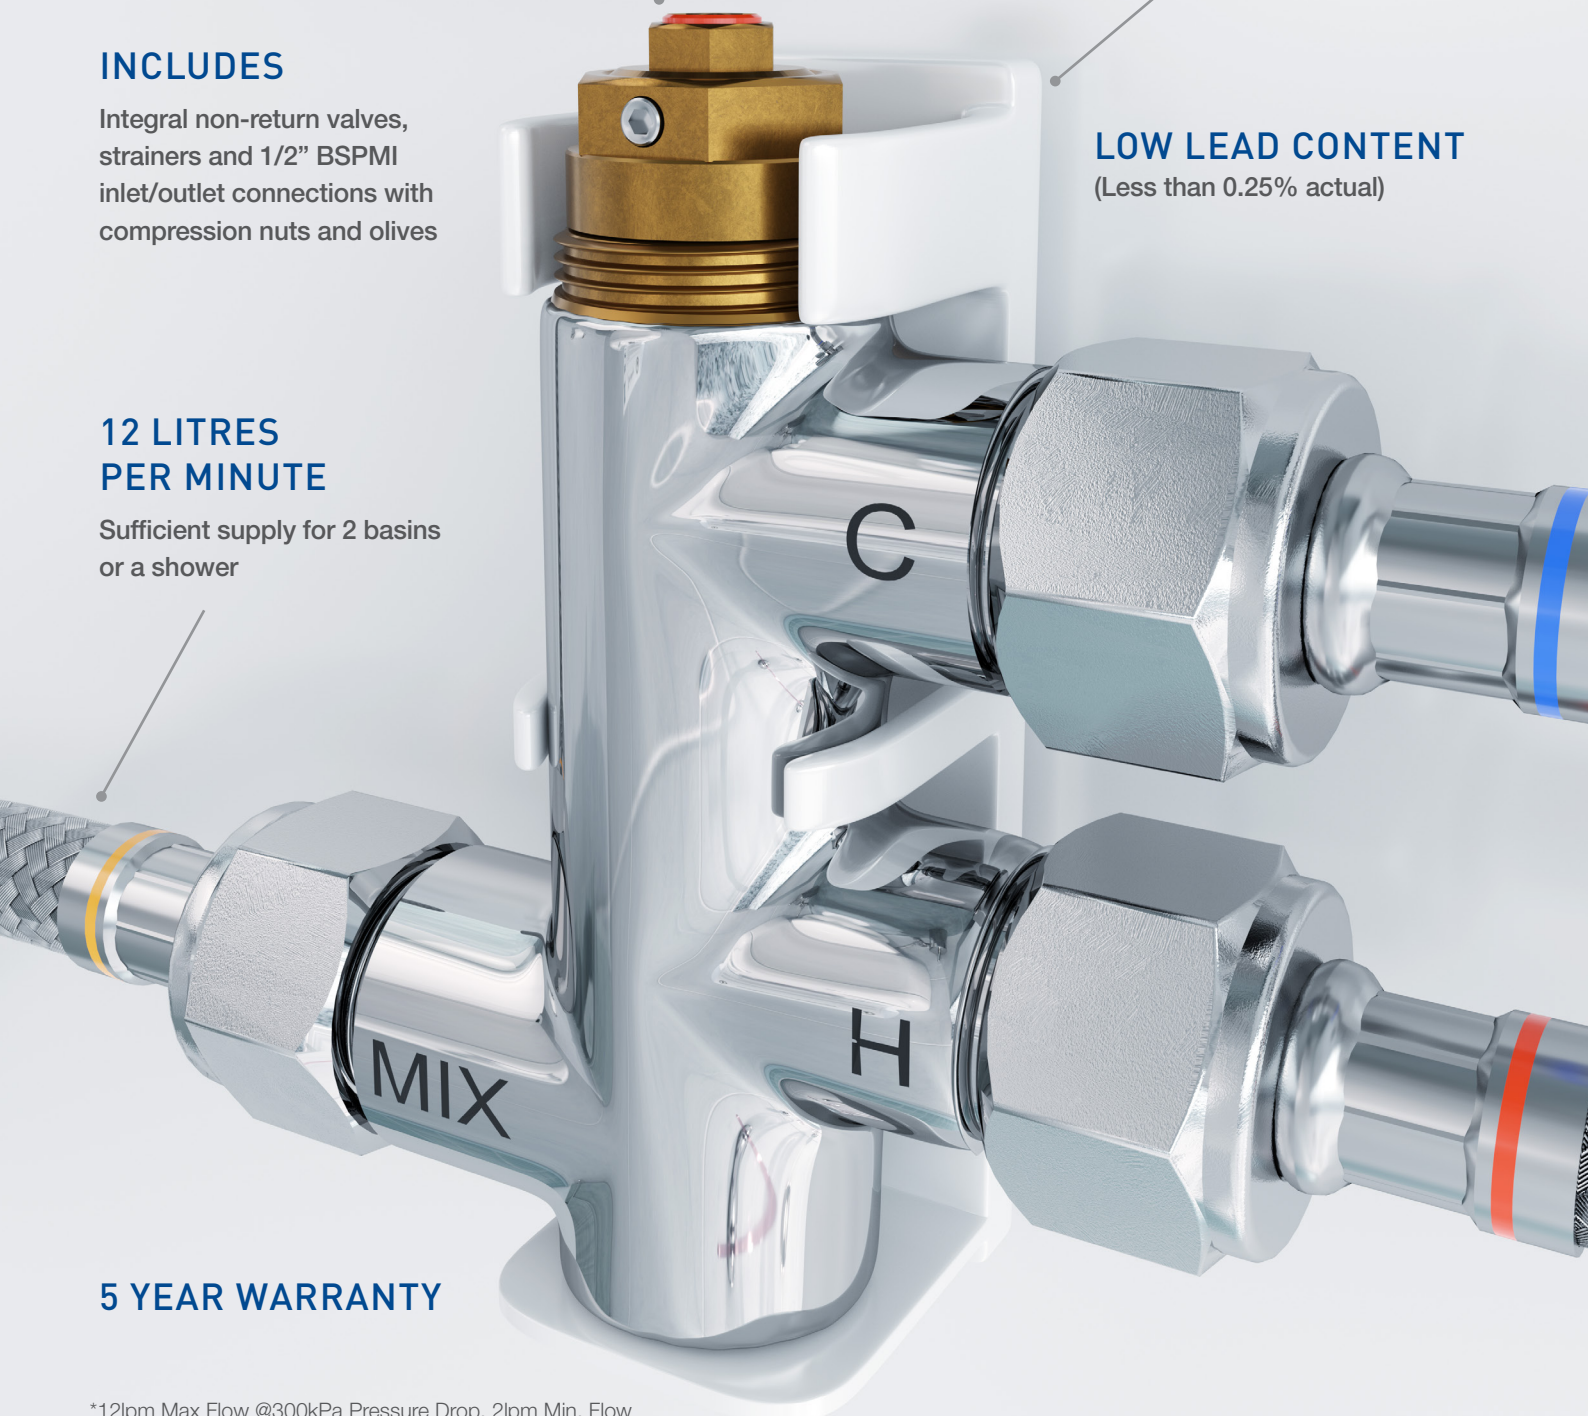

## 5 YEAR WARRANTY

\*12lpm Max Flow @300kPa Pressure Drop, 2lpm Min. Flow  
Suitable for Hot Water from 50°C (See installation instructions for details)

\*package does not include isolation valves or inlet hoses

To find out more information about the Aquablend® Mini TMV visit [enware.com.au](http://enware.com.au)  
[www.enware.com.au](http://www.enware.com.au) | 1300 369 273 | [info@enware.com.au](mailto:info@enware.com.au)

